


Overview

- M12, male, A-coded, 5-poles; PUR, 100 cm; M12, female, 90°, A-coded, 5-poles
- Dragchain capable, suitable for robotics $\pm 180^\circ/m$
- Head A: IP65, IP66K, IP67
- Cable: good resistance against chemicals, flames and oils
- Halogen free

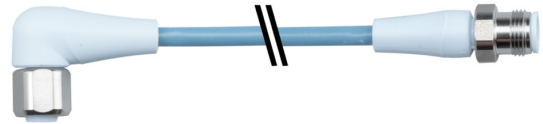

Technical data

Side A

Head A: Connection	M12
Head A: Angle cable outlet	0°
Head A: Gender	Male
Head A: Coding	A
Head A: No. of poles	5
Head A: LED	No
Head A: Width across flats	AF14
Head A: Tightening torque	0.6 Nm
Head A: Knurled nut material	Stainless steel (V4A)
Head A: Body color	Blue
Labeling sleeve side A	No

Side B

Head B: Connection	M12
Head B: Angle cable outlet	90°
Head B: Gender	Female
Head B: Coding	A
Head B: No. of poles	5
Head B: LED	No
Head B: Width across flats	AF14
Head B: Knurled nut material	Stainless steel (V4A)
Head B: Body color	Blue
Head B: Gasket material	EPDM
Labeling sleeve side B	No

Cables

Cable length	100 cm
Shielded	No
AWG	22
External sheath: Material	TPE-S
External sheath: Color	Blue

Cables

Wire cross section	0.34 mm ²
--------------------	----------------------

Cable

Shielded	No
Cable length	100 cm
AWG	22
Torsion speed	max. 35 cycles/min
Conductor: Material	Copper, bare
External sheath: Material	TPE-S
Insulation: Material	PP
Paired stranding	No
Torsion stress in °	$\pm 180^\circ/m$
Total stranding	5 wires strand around core-filler
Wire cross section	0.34 mm ²
Wire processing	No
External sheath: Color	Blue

Mechanical data

Head A: Degree of protection	IP65, IP68, IP69K
Head B: Degree of protection	IP65, IP68, IP69K
Torsion speed	max. 35 cycles/min
Torsion stress in °	$\pm 180^\circ/m$

Environmental conditions

Dragchain capable	Yes
Head A: Chemical resistance	Chemical resistance tested according to ECOLAB. If other media are used, the material resistance must be tested according to the application.
Head A: Flame resistance	HB (UL 94)

Technical data
Environmental conditions

Head A: Oil resistance	Good resistance to ASTM 1 oil and mineral oils. Limited resistance to hydraulic oils. If other oils are used, the resistance must be checked in relation to the application.
Head A: Acid and alkali resistant	Chemical resistance tested according to ECOLAB. If other media are used, the material resistance must be tested according to the application.
Head A: Pollution degree	3
Head B: Chemical resistance	Chemical resistance tested according to ECOLAB. If other media are used, the material resistance must be tested according to the application.
Head B: Flame resistance	HB (UL 94)
Head B: Oil resistance	Good resistance to ASTM 1 oil and mineral oils. Limited resistance to hydraulic oils. If other oils are used, the resistance must be checked in relation to the application.

Environmental conditions

Head B: Acid and alkali resistant	Chemical resistance tested according to ECOLAB. If other media are used, the material resistance must be tested according to the application.
Head B: Pollution degree	3
Cable: Acid and alkali resistant	Good (analogue FDA 21 178.3620, 178.3297, 177.1520)
Cable: Silicone-free	Yes

Commercial data

Eclass	27060311
--------	----------